



ICE WELL SERVING COUNTER

CTI-46 shown with optional customer exterior design package, breath guard, and tray slide.

Heavy-duty serving counter with ice well designed to meet the rugged use of commercial food service operations.

MODELS

CTI
31

CTI
46

CTI
61

CTI
76

CTI
91

Job: _____

Item No. _____



ICE WELL SERVING COUNTER



4 Standard Ice Pan Sizes available



Standard Finish is stainless steel, a variety of powder-coat colors available.



Ice Well has drain with shut-off valve.



6" Deep All-Stainless Steel Ice Well with foamed-in-place polystyrene insulation.



A Full Complement of Accessories available



Heavy-Duty Reinforced Construction





Standard with Heavy-Duty 5" Casters; 2 swivel and 2 swivel with brakes



Customize Carts available up to 93". Create your own combination of an ice well and open surface.

MODEL SPECIFICATIONS

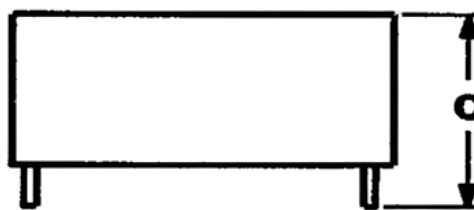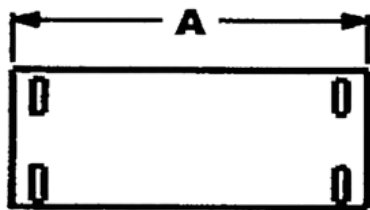

MODEL #	CAPACITY # of pans	WIDTH DIM A	DEPTH DIM B	HEIGHT DIM C	SHIP WEIGHT
CTI-31	2	36"	30"	36"	440 Lbs.
CTI-46	3	48"	30"	36"	355 Lbs.
CTI-61	4	63"	30"	36"	420 Lbs.
CTI-76	5	78"	30"	36"	480 Lbs.
CTI-91	6	93"	30"	36"	575 Lbs.



GENERAL

Ice well serving counter has 16 gauge stainless steel exterior and interior double-wall construction, reinforced with 12 gauge Galvanized steel hat-channels and base framing. Solid stainless steel bottom is standard. Ice pan is foamed-in-place with 1" of high-density polystyrene insulation. All exterior surfaces shall be ground and polished to a #4 finish.

*Powder coated unit's exteriors and bottoms will be constructed with 16 gauge paint-lock steel. The interior and exterior of the base unit will be powder-coated.



TOP

Top shall be one piece 16 gauge 300 series stainless steel (14 gauge available). Ice well is 6" deep, all-stainless steel.



CASTERS

Unit shall have 4 heavy-duty, 5" casters; 2 locking, through-bolted to the 12 gauge hat-channels.



ICE PAN

Constructed of 18 gauge stainless steel sloping from 6" to 6 1/2" at drain end. Well is foamed-in-place with 1" high-density polystyrene insulation on sides and bottom. An 18 gauge 304 stainless steel perforated false bottom for drainage is provided. A 3/4" drain with strainer and shut-off valve included.



ELECTRICAL CHARACTERISTICS

Optional 115 volt 15 amp convenience outlet available.

SECO

SELECT

TEST OUR METAL®



ACCESSORIES, OPTIONS, VARIATIONS

**Powder-coated base****A wide variety of Breath Guards****Adjustable Height Breath Guards****LED Lights****Tray Slides****Display Shelves** available**Plate Shelf****Heavy-Duty Push Handles****14 Gauge 304 Stainless Steel Top****Power Cord Wrap****Convenience Outlet****Heavy-Duty Stainless Steel Legs**